Design Infinity

WWW.DESIGN-INFINITY.COM

COMMERCIAL PROPOSAL

PROJECT NAME: HAMPTONS INTERNATIONAL CORPORATE OFFICE

Hamptons INTERNATIONAL

LOCATION: DUBAI HILLS ESTATE,DUBAI, UNITED ARAB EMIRATES

P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

Table of CONTENTS

1. Cover Letter with Notes & Exclusions
2. Bill of Quantities
3. Contact Person

Design Infinity

COVER LETTER

Date: 06-02-2025

REF : DI24_0025-GN-HAMPTONS-BOQ-R01

To

Mr. Nevine Abdallah
Operations
Hamptons International
Dubai, UAE

Dear Mr. Nevine Abdallah

Ref: FITOUT WORKS FOR HAMPTONS INTERNATIONAL CORPORATE OFFICE, PARK HEIGHTS SQUARE, DUBAI, UAE

We thank you for allowing us to offer our proposal for Fit out works in HAMPTONS INTERNATIONAL corporate office, Dubai, UAE. Please find herewith our competitive offer as per the attached bill of quantities amounting as below.

BILL OF QUANTITIES	
CIVIL WORKS	1,955,428.00
MEP WORKS	982,870.00
FURNITURE WORKS	506,452.00
GROSS SUMMARY-OFFICE FIT OUT WORKS	3,444,750.00
VAT 5% AED :	172,237.50

IT WORKS	284,296.00

Completion: To be discussed

Validity: 60 days from the above date.

Payment Terms: : 20% Advance payment, 70% Progressive payment, 10% on Retention. (5% at completion & handing over and 5% after the Defects Liability Period (DLP).

We look forward to establishing a constructive dialogue with you at all stages of your evaluation process. Assuring you of our best services at all times.

We hope our offer is in line with your requirement and look forward to working with you.

Thank you and best regards,

For Design Infinity LLC

Geetha Nayak
Managing Partner
Mobile: +971 50 146 7608
Email: geetha@design-infinity.com

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025

PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE

LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

NOTES AND EXCLUTIONS

1.0 NOTES

1.01 Any changes to the work, pertaining to the instructions from Landlord /authorities/employer will have an additional cost implication and to be agreed upon finalizing of details.

1.02 All Government/ Municipal/civil defense Fees ,Deposits, Building Deposits are to be paid by the Client on Actuals.

1.03 Any changes in quantity from what mentioned in BOQ, any additional scope of works mentioned by client or deemed necessary during site execution will be treated as variation.

1.04 We have consider the ironmongeries from Devon

1.05 All Finishes materials are considering as locally available.

1.06 MEP is predesigned by considering to reuse all existing MEP services and as per shared existing MEP drawings.

If any issues in existing MEP services performance, there will be a change in scope and cost.

2.00 **The Following Shall be arranged by Client at site free of cost to us**

2.01 Access/Passes

2.02 Water and Electricity for Works

2.03 Material storage area

3.00 **EXCLUSIONS**

3.01 VAT

3.01 Any deposits/ Fees to Govt. Authority/Landlord

3.02 Any item not quoted in the BOQ.

3.03 White goods

3.04 Arts, Artifacts, Display Items etc., if any

3.05 Existing MEP services such as Power upgradation, Chilled water upgradation are assumed to be provided by client/LL

3.06 Any works related with Main chilled water pipes / flow are not considered in pricing.

3.07 BMS, Fire suppression system are excluded.

3.08 Light prices are provisional sum and it may vary with final selections.

3.09 PDU part of FFE.

3.10 Any supply of IT/ACS/CCTV/WiFi/Screens are excluded.

3.11 All works in Toilet and pantry area excluded.

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

Design Infinity

BILL OF QUANTITIES

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025

PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE

LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

MAIN SUMMARY

SL NO	SCOPE OF WORK	QTY	UNIT	AMOUNT	REMARK
A	**CIVIL WORKS**				
1.0	GENERAL REQUIREMENTS	1	LS.	124,890.00	
2.0	DEMOLITION & CIVIL WORKS	1	LS.	5,537.00	
3.0	FLOOR FINISHES	1	LS.	316,609.00	
4.0	CEILING WORKS	1	LS.	179,581.00	
5.0	METAL WORKS	1	LS.	84,014.00	
6.0	GLASS PARTITION WORKS	1	LS.	71,610.00	
7.0	GYPSUM PARTITION WORKS	1	LS.	75,054.00	
8.0	WALL FINISHES	1	LS.	90,065.00	
9.0	WOODEN & GLASS DOORS	1	LS.	180,815.00	
10.0	CUSTOM JOINERY WORKS	1	LS.	703,129.00	
11.0	MISCELLANEOUS WORKS	1	LS.	124,124.00	
C	**MEP WORKS**				
11.0	HVAC WORKS	1	LS.	269,779.00	
12.0	ELECTRICAL WORKS	1	LS.	297,848.00	
13.0	FIRE FIGHTING, FIRE ALARM, EMERGENCY& EXIT LIGHTS	1	LS.	287,437.00	
14.0	PLUMBING WORKS & SANITARY WARES SUPPLY	1	LS.	NA	
16.0	LIGHT SUPPLY	1	LS.	127,806.00	
	LOOSE FURNITURE				
17.0	LOOSE FURNITURE	1	PS	506,452.00	
	GROSS AMOUNT			**3,444,750.00**	

15.0	IT WORKS	1	LS.	284,296.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORP(
LOCATION: LVL 01, PARK HEIGHTS SQUARE, D

BILL OF QUANTITIES

GENERAL REQUIREMENTS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
1.00	Mobilization, demobilization and internal transportation for Site Team and material	1	Item	9,656.00	9,656.00	
1.01	Co ordination Obtaining approval and permit from Building management and govt authorities Note: Fees/ deposit are actual and by client	1	Item	26,395.00	26,395.00	
1.02	Insurances	1	Item	6,438.00	6,438.00	
1.03	Project management, Supervision and Co-ordination with building management.	1	Item	63,732.00	63,732.00	
1.04	Regular and final cleaning of site including disposal of debris to approved municipality dump yard during the construction period	1	Item	12,875.00	12,875.00	
1.05	Contractor to regularly send weekly updates with photos preferable on Friday afternoon and to send minutes of meeting after each Project meeting. Project meeting will be done on every Friday morning.	1	Item	-	Included	
1.06	Contractor to send actual material sample board to be approved by the client and designer.	1	Item	-	Included	
1.07	Contractor to submit as-built drawings upon completion of the project. This including manual and other T&C certificate.	1	Item	3,219.00	3,219.00	
1.08	Allowance for the protection and hording.	1	Item	2,575.00	2,575.00	
1.09	Bank Guarantee charges for performance bond and retention	1	Item	-	Excluded; TBC by client	
1.10	Acoustic consultation charges	1	Item	-	Excluded; TBC by client	
	Sub Total				**124,890.00**	

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
2.00	**DEMOLITION & CIVIL WORKS**					
2.01	Allowance for the demolition of existing partition, ceiling and flooring works according to the site condition and demolition plan, and collecting and dumping the debris to municipality dump yard. Location: Existing internal walls, floor and ceiling	1	Item	-	Shell and core area	
2.02	Allowance for the chasing, chiseling and chipping, where ever required and other works related to MEP like passing and laying conduits for wiring ducting piping works on the walls and floors Note: Coring work subject to the approval from Building management.	1	Item	3,863.00	3,863.00	
2.03	Supply and Application of water proofing with single layer bituminous membrane to the wall and floor. Locations: Planter Boxes	1	LS	1,674.00	1,674.00	
	Sub Total - Demolition & Civil Works				**5,537.00**	
3.00	**FLOOR FINISHES**					
3.01	Supply and installation of raised access floor Location: Office 510, 511 & 512 Material Ref: ORE: FS800 Cementitious, with Steel Sheet top & bottom, panels sprayed with Grey Powder Epoxy, Panel Dimensions "600mm x 600mm x 33mm" with up to 200-300mm FFH Flat & Cross Head Pedestals, Corner Lock Screws	850	Sqm	163.00	138,550.00	
3.02	Supply and installation of HPL raised access floor Location: Server room Material Brand: Unitile	1	Ls	5,794.00	5,794.00	
3.03	Supply and installation of carpet flooring -01 Location: Sales lounge, Meeting rooms, workstations. Range:TBC, PC rate for supply is AED 60/ Sqm	110	Sqm	102.00	11,220.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
3.04	Supply and installation of carpet flooring -02 Location: Sales lounge, Board rooms Range: TBC, PC rate for supply is AED 60/ Sqm	235	Sqm	104.00	24,440.00	
3.05	Supply and installation of carpet flooring -03 Location: Workstations Range:TBC, PC rate for supply is AED 60/ Sqm	110	Sqm	104.00	11,440.00	
3.05	Supply and installation of Porcelain tile flooring Location: Reception area, corridor Material Ref: PC rate for supply is AED 120/Sqm Brand: Rak ceramics	310	Sqm	239.00	74,090.00	
3.06	Supply and installation of LVT flooring Location: Stoage and server room Material Ref: TBC	45	Sqm	164.00	7,380.00	
3.07	Metal Transition trim: Supply and installation of metal transition trim Location: Between different floor finishes	145	Mtr	80.00	11,600.00	
3.08	Supply and installation of self levelling. Location: Vinyl flooring	45	Sqm	45.00	2,025.00	
3.09	Supply and installation of calcium silicate board over the raised access floor to the tile and marble flooring.	310	Sqm	97.00	30,070.00	
	Sub Total - Floor Finishes				**316,609.00**	
4.00	**CEILING WORKS**					
4.01	Supply and installation of Single layer regular gypsum suspended ceiling with necessary suspension system. Location: Reception, passages. Material Ref: Knauf or equivalent	235	Sqm	103.00	24,205.00	
4.02	Supply and installation of perforated gypsum suspended ceiling with necessary suspension system. Location: Reception, Closed offices. Material Ref: Knauf or equivalent	212	Sqm	177.00	37,524.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
4.03	Supply and installation of 60x60 gypsum tile suspended ceiling with necessary suspension system. Location: Storage and server	45	Sqm	90.00	4,050.00	
4.04	Supply and application of Paint finish to the gypsum ceiling Material Ref: RAL: TBC	447	Sqm	36.00	16,092.00	
4.05	**Ripple Metal Ceiling:** Supply and installation of 0.8mm stainless steel 304 grade mirror finish Bronze Electroplated water-rippled sheet ceiling cladding with FR 18mm MDF & 1 mtr Height Mild Steel Supports above the cieling. Exclusion:Electrical works, MEP work,LED works,Signage Works Note:- * Exposed framing will be visible at every 600mm (Subject to final design and approval), T Profile suggested at the joint lines to cover the undulation (Gap due to the waviness in between 2 sheet joints) of the rippled sheet edges. * All the materials will be sourced locally.	25	Sqm	3,341.00	VE option mentioned below	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
4.05a	**Option:Without Electroplating.** Supply and installation of 0.8mm stainless steel 304 grade mirror finish water-rippled sheet ceiling with FR 18mm MDF & 1 mtr Height Mild Steel Supports above the cieling. Exclusion:Electrical works, MEP work,LED works,Signage Works Note:- * Exposed framing will be visible at every 600mm (Subject to final design and approval), T Profile suggested at the joint lines to cover the undulation (Gap due to the waviness in between 2 sheet joints) of the rippled sheet edges. * All the materials will be sourced locally. Samples will be supplied for the approval. The above prices are subject to sample approval.	25	Sqm	2,446.00	61,150.00	
4.06	Supply and installation of bulkheads Paint finish: RAL TBC	210	Mtr	116.00	24,360.00	
4.07	Supply and installation of Curtain bulkheads Paint finish: RAL TBC	100	Mtr	122.00	12,200.00	
	Sub Total - Ceiling Finishes				**179,581.00**	
5.00	**METAL WORKS**					
5.01	Supply & Intallation of SS 304 Grade Brushed Bronze Finish Pipe Seperator using Dia 50x2mm Pipe in 3 mtr height fixing to the Floor using the sleeves & Top using the GI thread Bar Connections	1	Nos	14,484.00	14,484.00	

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
5.02	Supply & Installation of Free standing seperator Made of Hairline Bronze Electroplated Mesh & SS 304 SHS 50x50x2mm including necessary accessories for Floor Fixing. Size: 800mm(L) x 3000mm(H) Mesh Spec:-SS 304 Expandable Mesh Opening 10x20x3mm thk Finish:Bronze Electroplating Note: All the materials are sourced locally.Samples will be provided for approval .Prices are subject to sample approval	10	Nos	6,953.00	69,530.00	
	Sub Total - Metal Works				**84,014.00**	
6.00	**GLASS PARTITION WORKS**					
6.01	Supply and installation of single glazed partition using 13.52mm acoustic laminated glass, with 25x25mm QIC Internal glazing system (Powder coated finish) and cleat slots for seamless joining.(Acoustic Rating-Rw-38dB). Partition height : 2600mm	105	Sqm	682.00	71,610.00	
	Sub Total - Glass Partition Works				**71,610.00**	
7.00	**GYPSUM PARTITION WORKS**					
7.01	Supply and installation of 100mm Thk. Regular gypsum board partition including single layer of 12.5mm Thk Regular gypsum board on both side, GI studs & tracks & necessary fittings. Brand :Knauf or equivalent. Height: 3.950mtr	203	Sqm	109.00	22,127.00	
7.02	Supply and installation of 100mm Thk. Regular gypsum board partition including single layer of 12.5mm Thk Regular gypsum board on both side, GI studs & tracks & necessary fittings. Brand :Knauf or equivalent. Height: Baffle wall above glass partition. 1350mm	41	Mtr	148.00	6,068.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
7.03	Supply and installation of 100mm Thk. Fire rated gypsum board partition including single layer of 12.5mm Thk FR gypsum board on both side, GI studs & tracks & necessary fittings. Brand :Knauf or equivalent. Height: 3.395mtr	45	Sqm	116.00	5,220.00	
7.04	Supply and installation of Regular gypsum cladding using single layer of 12.5mm Thk Regular gypsum board on single side, GI studs & tracks & necessary fittings. Wide: As per drawing Brand :Knauf or equivalent. Height: As per the drawing. Location: Existing wall,	235	Sqm	97.00	22,795.00	
7.05	Supply and installation of Curved Regular gypsum cladding using single layer of 12.5mm Thk Regular gypsum board on single side, GI studs & tracks & necessary fittings. Wide: As per drawing Brand :Knauf or equivalent. Height: As per the drawing. Location: Existing round column	3	Nos	2,575.00	7,725.00	
7.06	Supply and installation of Curved Regular gypsum partition using single layer of 12.5mm Thk Regular gypsum board on single side, GI studs & tracks & necessary fittings. Wide: As per drawing Brand :Knauf or equivalent. Height: As per the drawing. Location: Meeting	30	Nos	193.00	5,790.00	
7.07	Supply and installation of Fire rated gypsum cladding using single layer of 12.5mm Thk FR gypsum board on single side, GI studs & tracks & necessary fittings. Wide: As per drawing Brand :Knauf or equivalent. Height: As per the drawing. Location: Server area	17	Sqm	109.00	1,853.00	

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
7.08	Allowance for the curved gypsum wall to the back side of reception area.	1	LS	3,476.00	3,476.00	
	Sub Total -Gypsum Partition Works				**75,054.00**	
8.00	**WALL FINISHES**					
8.01	Supply and installation of wall paper finish Material Ref: PC rate for supply is AED 35/ sqm	180	Item	82.00	14,760.00	
8.02	Supply and installation of Graphic sticker cladding	1	Item	2,704.00	2,704.00	
8.03	Acoustic fabric paneling at phone booth area at 3 sides Note: NRC shall be applicable only for 4 sides closed acoustic fabric paneling. Then we can provide NRC rating up to 0.85	51	Sqm	1,226.00	VE Option below	
8.03A	Supply and installation of Acoustic wall paper	51	Sqm	1,001.00	51,051.00	
8.04	Supply and application of jotun Fenomastic paint finish to the walls. Ral: TBC	285	Sqm	35.00	9,975.00	
8.05	Supply and installation of 50mm high MDF PU paint skirting	115	Sqm	58.00	6,670.00	
8.06	Supply and installation of Tile skirting	45	Sqm	109.00	4,905.00	
	Sub Total - Wall Finishes				**90,065.00**	
9.00	**DOORS**					
9.01	Supply and installation of framed single leaf swing door using 13.52mm thick acoustic laminated glass with QIC Evolution outer frame (Size-44x68mm) and QAS Integra Shutter frame (56x30mm) ,fitted with GEZE Floor spring, Offset Straps, bottom lock and 1200mm long pull handle. (32mm Dia, 1000mm C/C). All fittings are in powder coated finish. (Acoustic Rating-Row 36dB) Size: 900x 2600mm Location: Meeting room, Board room	6	Nos	6,695.00	40,170.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
9.02	Supply and installation of framed **MANUAL** single leaf sliding door using 13.52mm thick acoustic laminated glass with QIC Evolution outer frame (Size-44x68mm) and QAS Integra Shutter frame (56x30mm) ,fitted with GEZE Floor spring, Offset Straps, bottom lock and 1200mm long pull handle. (32mm Dia, 1000mm C/C). All fittings are in powder coated finish. Size: 900x 2600mm Location: Meeting room, Board room	4	Nos	5,408.00	21,632.00	
9.03	Supply & Installation of Frameless Automatic Single Glazed 12mm Clear Glass Double Sliding Door with Fixed Pannels with Aluminium Powder Coated 30x20x30mm U Channel Fixing & Steel Support Door Size: 1050mm x 2500mm Fixed Pannel Size: 802mm x 2500mm Operator : Dormakaba ES 250 Pro Easy S/L Operator 4500 mm Frameless Dormakaba Electromechanical Lock :- 1 No. Door Panel: 12mm thick clear tempered glass Inclusive of : Automatic Operator, Floor Guides,Program Switch,EndPlates, Safety Sensor. Exclusion :-UPS Battery backup, Civil works , Electricity ,Any additonal requirements than mentioned in the above description,Acess control,S.Laminated glass / Frames,Low iron Glass	4	Nos	20,600.00	82,400.00	
9.04	Supply & install of 60mints FR sliding wooden door made in solid beech/Marenti solid wood frame . Shutter have 54 mm thk solid core door shutter in both side flutted Oak veneer in lacquer finish including metal long handle @ 1200 mm ht. Size: 1300 x 2400 mm Location : Storage 2nos, server and passage	4	Nos.	8,774.00	35,096.00	
9.05	Allowance for the touch up works for existing door, to the passage	1	Nos.	1,517.00	1,517.00	
	Sub Total - DOORS				**180,815.00**	
10.00	**JOINERY WORKS**					

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
10.01	**RECEPTION COUNTER**, made of MDF PU paint unit with solid surface counter top, facia finished bronze metal cladding and bendable acrylic light passing facia as addional including mobile pedestal unit. Size-6600x700x750/1100 mm ht.	1	Item	65,923.00	65,923.00	
10.02	**RECEPTION COUNTER**, made of MDF PU paint unit with solid surface counter top, facia finished bronze metal cladding and bendable acrylic light passing facia as addional including mobile pedestal unit. Size-3150x700x750/1100 mm ht.	1	Item	40,634.00	40,634.00	
10.03	**BAR COUNTER** Supply and installation of bar counter made of MDF veneer unit with dior marble(PC rate-465 AED/Sqm) counter top and facia cladding including bronze metal vertical feature and ripped metal horizontal cladding with light provision as per the design given. Size-10800+3540 x1250/600x800/1100 mm ht.	1	Nos.	122,415.00	122,415.00	
10.04	**BAR BACK COUNTER** made of MDF venner bottom unit with dior marble counter top, top open shelf made of antique mirror wall panel withSS 304 Grade Hairline Finish Bronze Electroplated Shelving unit consists of SS 304 Pipe Dia 25mm x 2mm,SS 304 Tube Framing using 20x20x2mm SHS ,8mm Bronze Tinted Glass with necessary wooden backing finished with electroplated bronze metal cladding. Size-9500x600/400x2600mm ht.	1	No.	95,140.00	95,140.00	

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
10.05	**MODEL DISPLAY I,** Made of MDF/wood structure finished with one layer of texture paint finish and the second layer in electroplated metal cladded including bendable acrylic barrior as per the design given. Size-3370x1200x1200 mm ht.	1	No.	27,948.00	27,948.00	
10.06	**MODEL DISPLAY II**, Made of MDF/wood structure finished with one layer of texture paint finish and the second layer in electroplated metal cladded including bendable acrylic barrior as per the design given. Size-3370x1200x1200 mm ht.	4	No.	16,833.00	67,332.00	
10.07	**SUBLEASE SPACE TV WALL** made of MDF structure finished with texture paint finish in necessary wood/metal support. Size -2700x150x2800 mm ht.	3	No.	19,787.00	59,361.00	
10.08	**COFFE POINT** made of MR MDF Veneer finish bottom unit with dior marble counter top with full ht TV wall on rear side. Size -3060x600x800mm ht. + 2600x150x3000 mm HT	1	Item	19,252.00	19,252.00	
10.09	**PANTRY COUNTER**, made of Bottom & top unit in MR MDF with Veneer/PU paint finish. Include granit/12mm thk solid surface top. Size- 2350x600+400x2750mm ht.	1	Item	11,531.00	11,531.00	
10.10	Size - 1700x600/400x800/750 mm HT	2	No.	8,341.00	16,682.00	
10.11	**PLANTER BOX**, made of Bottom storage in MDF Veneer flutted design with top plain MDF venner planter box for live plants GI tray. Size- 1850x400x900 mm ht.	11	Item	4,844.00	53,284.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
10.12	**PHONE BOOTH LEDGE**, made of MDF Veneer ledge in 30mm thk with cantilever metal support. Size- 1550x600x750/50 mm ht.	6	Item	1,456.00	8,736.00	
10.13	**PRINTING STATION**, made of MDF Veneer bottom unit and top in same MDF veneer open shelves with back painted glass splash back. Size- 5850x600x800/1200mm ht.	1	Item	30,571.00	30,571.00	
10.14	**BOARD ROOM TABLE**, made of MDF Veneer bottom support with dior marble(PC rAte-465 AED/LM) table top with all necessary support. Size- 4500x1600x750 mm ht.	1	Item	24,849.00	24,849.00	
10.15	**BOARD ROOM TV WALL** made of MDF wall panel finished with texture paint finish and antique mirror cladding with wood/metal TV backing support. Size- 4440x200x3000 mm ht.	1	Item	14,793.00	14,793.00	
10.16	**MEETING ROOM TV WALL** made of MDF wall panel finished with texture paint finish and antique mirror cladding with wood/metal TV backing support. Size- 2700x200x3000 mm ht.	3	Item	9,045.00	27,135.00	
10.17	**PLANTER BOX**, made of Bottom in MDF Veneer flutted design with top plain MDF venner planter box for artifical plants Size- 8000x400x600 mm ht.	1	Item	17,543.00	17,543.00	
	Sub Total - Joinery works				**703,129.00**	
11.00	**MISCELLANEOUS WORKS**					
	SIGNAGES					

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OF
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

CIVIL WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
11.01	Supply and installation of 20mm SS molded side painted with 10mm frosted acrylic side lit signage fixed on the existing background with necessary fittings. Size – 2500 x 696mm Hamptons INTERNATIONAL	1	Nos	8,594.00	8,594.00	
	BLINDS					
11.02	Supply & Installation of Manually operated Sunscreen Roller Blinds with stainless steel pulling chain. Fabric: TBC Area-open workstation & closed office	330	Sqm	77.00	25,410.00	
	WHITE GOODS					
11.03	This scope is excluded and by client					
	PLANTS					
11.04	Plants with pots Artificial plants- 1800mm hights	9	Nos	4,506.00	40,554.00	
11.05	Plants with planter boxes-Natural plants	11	Nos	4,506.00	49,566.00	
	Sub Total - Miscellaneous Works				**124,124.00**	
				TOTAL FOR ID WORKS	**1,830,538.00**	

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
12	**LIGHTING FIXTURES WORKS**					
	Supply of Light fittings / fixtures as per received proposed drawings / all in accordance with design visual : ***Brands : Architectureal light : Creta lighting/Axom, Decortive : Creta/Customized*** ***All lights are non dimmable except board room***					
12.01	LN1 - Recessed linear lights *Location : Corridor*	80	Mtrs	250.00	20,000.00	
12.02	LN2 - Suspended linear lights *Location: Workstations*	50	Mtrs	231.00	11,550.00	
12.03	SP1 - Recessed led twinlights *Location: Workstations,, Reception, waiting areas*	125	Nos	231.00	28,875.00	
12.04	SP1-D - Recessed led twinlights- Dimmable *Location: Board room*	8	Nos	425.00	3,400.00	
12.05	WL1 - Decorative wall light *Location: Corridor*	6	Nos	375.00	2,250.00	
12.06	SL1 - Indirect lighting at ceiling *Location: Meeting, sales area*	300	Mtrs	69.00	20,700.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
12.07	SL1-D - Indirect lighting at ceiling-Dimmable *Location: Board room*	20	Mtrs	106.00	2,120.00	
12.08	Sl-J1 - Indirect lighting at Joinery *Location: Joinery*	130	Mtrs	69.00	8,970.00	
12.09	P01 - Decorative pendant light *Location: Board room*	1	Nos	313.00	313.00	
12.1	P02 - Decorative pendant 2 *Location: Caffe bar*	4	Nos	688.00	2,752.00	
12.11	P03 - Decorative pendant *Location: Caffe bar*	2	Nos	688.00	1,376.00	
12.12	P04-A - Decorative pendant set of 8 *Location: Main reception , sales area*	5	Nos	3,000.00	15,000.00	
12.13	P05 - Decorative pendant light *Location: Sales area*	2	Nos	1,500.00	3,000.00	
12.14	P06 - Decorative pendant light *Location: Meeting rooms*	3	Nos	2,500.00	7,500.00	
	TOTAL FOR LIGHT FIXTURES					**127,806.00**

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
13	**ELECTRICAL WORK**					
	Power distribuition SMDB / DB works:					
13.01	Modification of existing **SMDB**	1	Nos	5,625.00	5,625.00	
13.02	Supply of new **SMDB**	1	Nos	10,625.00	10,625.00	
13.03	Supply and installation of new DBs	3	Nos	4,750.00	14,250.00	
	Power cabling works :					
13.04	Incoming cable for the DB	1	Item	6,743.00	6,743.00	
13.05	Incoming cable for the SMDB 4C x 95 sqmm XLPE/SWA/PVC + 1 C 50 sqmm ECC	1	Item	8,300.00	8,300.00	
	Cable tray and trunking works for Power cables:					
13.06	Cable trunking @ HL for Lights	1	Item	8,213.00	8,213.00	
13.07	Cable trunking @ HL for power	1	Item	8,669.00	8,669.00	
13.08	Cable tray @ LL for power	1	Item	10,038.00	10,038.00	
13.09	Cable tray @ LL for Data	1	Item	10,950.00	10,950.00	
13.1	Cable trunking @ HL for Data	1	Item	9,581.00	9,581.00	
	Isolator as per the power requirements.				***N/A***	
	Light Installation works					
13.11	Supply and installation of Conduit and wiring for the light fixtures	156	Nos	163.00	25,428.00	
13.12	Supply and installation of Conduit and wiring for the Strip light	450	Mtr	50.00	22,500.00	
13.13	Supply and installation of Conduit and wiring for linear lights	130	Mtr	31.00	4,030.00	
13.14	Installation of technical light fixtures	162	Nos	38.00	6,156.00	
13.15	Installation of LED strip lights	450	Mtr	25.00	11,250.00	
13.16	Installation of Decorative / Pendant lights	14	Nos	94.00	1,316.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
13.17	Supply and installation of containment and control wiring for the Lighting control system for only board room.	15	Nos	125.00	1,875.00	
	Switches Installation & Supply of lighting control system works:					
13.18	Supply and installation of Switches for all closed rooms and boardrooms. *Brand : Schneider / equivalent* *Finishes: PVC white*	1	Item	2,500.00	2,500.00	
13.19	Supply and installation of **Multi Gang 1 Way** Switch *Brand : Schneider / equivalent* *Finishes: BSS*	3	Nos	1,000.00	3,000.00	
13.2	Supply and installation of **Light control system -** Dali type with Button Keypad for boardroom	1	Item	10,375.00	10,375.00	
13.21	Supply and installation of **Motion sensors / PIR Motion / Occupancy sensors.**				N/A	
	Power Sockets Installation works					
13.22	Supply & installation of **13A Single power** socket with necessary conduiting, wiring and accessories. *Brand : MK / Schneider / Legrand equivalent* *Finishes : PVC White*	8	Nos	325.00	2,600.00	
13.23	Supply & installation of **13A Double power** socket with necessary conduiting, wiring and accessories. *Brand : MK / Schneider / Legrand equivalent* *Finishes : PVC White*	41	Nos	344.00	14,104.00	

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
13.24	Supply and installation of **20A DP switched socket** with neon indicator including necessary conduiting, wiring and accessories for Water heater for existing toilets and pantry. Brand : MK / Schneider / Legrand equivalent Finishes : PVC white	3	Nos	413.00	1,239.00	
13.25	Supply & installation of **FB1** Three Compartment Floor box, including wiring and PVC coated GI flexibles / PVC flexibles Config: 1 Nos. - 13A Twin Socket outlets, spaces for 2 nos Data RJ45 outlets *Brand: Davis*	79	Nos	688.00	54,352.00	
13.26	Supply & installation of **FB2** Three Compartment Floor box, including wiring and PVC coated GI flexibles / PVC flexibles Config: 1 Nos. - 13A Twin Socket outlets, spaces for 4 nos Data RJ45 outlets *Brand: Davis*	5	Nos	813.00	4,065.00	
13.27	Supply & installation of **FB3** Three Compartment Floor box, including wiring and PVC coated GI flexibles / PVC flexibles Config: 1 Nos. - 13A Twin Socket outlets, spaces for 4 nos Data RJ45 outlets, 1 HDMI *Brand: Davis*	5	Nos	813.00	4,065.00	
13.28	Supply and installation of **13A switched fused spur outlet** including containment and wiring for FACP, 24/7 DCD panel, Emergency panel, LCP- boardroom	4	Nos	363.00	1,452.00	
13.29	Supply and installation of **16A/32A commando socket for IT racks** including necessary containment and wiring accessories	2	Nos	1,000.00	2,000.00	
13.3	Allow cost for power supply for **VAVs**	4	Nos	375.00	1,500.00	
13.31	Allow cost for power supply for FCUs	11	Nos	375.00	4,125.00	
13.32	Allow cost for power supply for **Signages**	2	Nos	438.00	876.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
13.33	Allow for power for AV works	10	Nos	325.00	3,250.00	
	Power Sockets Installation works					
13.34	Supply and installation of Conduit for **IT Data** points	100	Nos	113.00	11,300.00	
13.35	Supply and installation of Conduit for **HDMI** points	8	Nos	188.00	1,504.00	
13.36	Supply and installation of Conduit for **Access** points	2	Nos	188.00	376.00	
13.37	Supply and installation of Conduit for **Wi-fi** points	9	Nos	113.00	1,017.00	
13.38	Supply and installation of Conduit for **Camera**	8	Nos	113.00	904.00	
13.39	Supply and installation of Conduit for **AV** works like speakers, Projectors, Room booking system etc.	15	Nos	113.00	1,695.00	
13.4	PVC Conduiting works involved in carrying **Fiber optic** cabling Works from building IT room to proposed premises.	1	Item	1,000.00	1,000.00	
	Sundries					
13.41	Allow for **testing and commissioning** of electrical services (Any 3rd party testing and certifications excluded)	1	Item	1,500.00	1,500.00	
13.42	Co-ordination for DEWA approvals	1	Item	3,125.00	3,125.00	
13.43	Allow for identification **labels** including plates, discs, labels, charts and color coding for electrical services.	1	Item	375.00	375.00	
	TOTAL FOR ELECTRICAL WORKS					**297,848.00**
14	**HVAC WORKS**					
	AC Works					
14.01	Supply and installation of New FCUs with necessary fittings and accessories	11	Nos	3,563.00	39,193.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
14.02	Supply and installation of New thermostats with necessary fittings and accessories	11	Nos	438.00	4,818.00	
14.03	Supply and installation of chilled water valve package for FCUs with necessary pipe connection , pipe fittings and accessories .	11	Nos	2,313.00	25,443.00	
14.04	Supply and installation of VAV for Closed Offices with necessary fittings and accessories including thermostat	4	Nos	2,438.00	9,752.00	
14.05	Supply and installation of new chilled water piping with rubber insulation necessary fittings and accessories .	1	Item	25,438.00	25,438.00	
14.06	Supply and installation of PI duct work with necessary fittings and accessories for the for Supply & Return Air Ducting	275	Sq.m	200.00	55,000.00	
14.07	Supply and installation of GI duct work with necessary fittings and accessories for the for Fresh air duct	55	Sq.m	238.00	13,090.00	
14.08	Modification of existing Extract duct for café beside reception areas including extract diffusers(2 nos)	1	Item	6,313.00	6,313.00	
14.09	Supply and installation of VCDs with necessary fittings and accessories	78	Nos	113.00	8,814.00	
14.1	Supply and installation of flexible duct including necessary fixtures	1	Item	1,875.00	1,875.00	
14.11	Supply and installation of Plenum box including necessary fixtures	1	Item	16,380.00	16,380.00	
14.12	Supply and installation of Linear/Square diffuser for Supply/Return with necessary supports and accessories	156	m	225.00	35,100.00	
14.13	Supply and installation of Extract fans				N/A	**considered as existing to be reused.**
14.14	Supply and installation of Extract Diffuser with necessary supports and accessories				N/A	**considered as existing to be reused.**
14.15	Chemical Flushing for the Chilled water Pipe line	1	Item	16,875.00	16,875.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
14.16	Supply and installation of the Condensate pipe works for FCU/AHU with necessary fittings and accessories	1	Item	4,813.00	4,813.00	
14.17	Air Balancing, Water Balanicng for the FCU	1	Item	6,875.00	6,875.00	
	TOTAL FOR HVAC WORKS					**269,779.00**
15	**PLUMBING WORKS**					
	PLUMBING WORKS					
15.01	PLUMBING WORKS				N/A	**Dry pantry as per design.**
	TOTAL FOR PLUMBING WORKS					**-**
16	**CIVIL DEFENSE WORKS**					
	FIRE ALARM WORKS					
16.01	Supply and installation of Single loop Fire Addressable Alarm Control Panel **(FACP)**	1	Nos	15,625.00	15,625.00	
16.02	Supply and Installation of new addressable optical **smoke** detectors with built in isolator base.	39	Nos	975.00	38,025.00	
16.03	Supply and Installation of new addressable optical **Heat** detectors with built in isolator base.	3	Nos	975.00	2,925.00	
16.04	Relocation of existing Smoke detector				N/A	**No existing details / Asbuilts not available.**
16.05	Supply and Installation of Addressable **Void** smoke detector	42	Nos	975.00	40,950.00	**Void is more than 800mm**
16.06	Supply and Installation of new **remote indicators** for Void smoke detector	42	Nos	313.00	13,146.00	
16.07	Supply & Installation of Addressable **break glass / Manual call point** with cover	4	Nos	1,000.00	4,000.00	
16.08	Supply & Installation of Addressable **sounder & flasher**	4	Nos	1,000.00	4,000.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
16.09	Supply and Installation of New IFU with Necessary Wiring and accessories for interfacing with DCD panel, EMP, Access door (3), FACP, MSFD(2), Music system	9	Nos	1,313.00	11,817.00	
16.1	Programming of new fire alarm panel to include existing and new smoke detector loops.	1	Item	6,875.00	6,875.00	
16.11	Testing and comissioning of new FACP	1	Item	2,500.00	2,500.00	
16.12	Relocation of existing Speakers	8	Nos	438.00	3,504.00	**Qty may vary as per site condition.**
	TOTAL FOR FIRE ALARM WORKS					**143,367.00**
	EMERGENCY AND EXIT LIGHT WORKS					
16.13	Supply & Installation of Self Contained New Emergency with necessary wiring and accessories	25	Nos	625.00	15,625.00	
16.14	Supply & Installation of New Self-contained Exit Light with necessary wiring and accessories	5	Nos	688.00	3,440.00	
16.15	Supply & Installation of New Self-contained Directional Exit Light with necessary wiring and accessories	4	Nos	688.00	2,752.00	
16.16	Supply and installation of emergency monitoring panel **(EMP)**	1	Nos	8,125.00	8,125.00	
16.17	Programing, Testing and commissioning for the Emergency panel	1	item	1,250.00	1,250.00	
16.18	Relocation of existing Emergency lights				N/A	
	TOTAL FOR EMERGENCY AND EXIT LIGHT WORKS					**31,192.00**
	FIRE FIGHTING WORKS					
16.19	Supply & installation pendent sprinkler with associated pipe and fittings.	90	Nos	688.00	61,920.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
16.2	Supply & installation of upright sprinkler with associated pipe and fittings.	7	Nos	688.00	4,816.00	**Void is more than 800mm**
16.21	Relocation of existing Sprinklers	83	Nos	438.00	36,354.00	
16.22	Supply & installation of 6 kg DCP fire extinguisher	4	Set	225.00	900.00	
16.23	Supply & installation of 5 kg CO2 fire extinguisher	4	Set	300.00	1,200.00	
16.24	Supply & installation of fire blanket	1	Nos	188.00	188.00	
16.25	Pressure test	1	Nos	4,375.00	4,375.00	
16.26	Charges for Zone control valve closing	1	Item	3,125.00	3,125.00	
	TOTAL FOR FIRE FIGHTING WORKS					**112,878.00**
	TOTAL MEP WORKS					**982,870.00**
17	**IT WORKS**					
	STRUCTURED CABLING SYSTEM					
17.01	UK Face Plate Plain 02 Port White	125	Nos	9.00	1,125.00	
17.02	UTP RJ45 Cat 6A Keystone Punchdown Jack Module, AW	140	Nos	15.00	2,100.00	
17.03	UTP RJ45 Cat 6A Keystone Punchdown Jack Module, AW	140	Nos	15.00	2,100.00	
17.04	Patch Panel, 24 Port, 1 RU, BL	6	Nos	94.00	564.00	
17.05	Sloped Shuttered Adapter, 1 Port, Arctic White PK/10	140	Nos	9.00	1,260.00	
17.06	1U Metal Cable Management with cover	6	Nos	50.00	300.00	
17.07	Copper Cable, Cat 6A, 23 AWG, U/UTP, LSZH-1, White-305m roll	35	Nos	775.00	27,125.00	
17.08	Network rack	1	Nos	3,500.00	3,500.00	
17.09	06WAY PDU UNIVERSAL SOCKET WITH SWITCH, 13AMP, 1.8MTR CABLE LENGTH, UK PLUG, 19" INSTALLATION	2	Nos	106.00	212.00	
17.1	Category 6A U/UTP Patch Cord PVC 01 MTR	150	Nos	15.00	2,250.00	
17.11	Category 6A U/UTP Patch Cord PVC 03 MTR	150	Nos	18.00	2,700.00	
17.12	Installation Testing and Commissioning (Including Calibrated Fluke Testing and documentation)	140	Nos	106.00	14,840.00	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
17.13	Supply and installation of 6 core single mode cable from server room to floor telephone room to hire ISP services	1	LS	3,500.00	3,500.00	
	CCTV- Hikvision IP Camera					
17.14	Supply and installation of 4MP IR DOME CAMERA	15	Nos	438.00	6,570.00	
17.15	Supply and installation of 16 channel NVR 16-CH NVR	1	Nos	1,750.00	1,750.00	
17.16	Supply and installation of 8TB hard disc for 30 days	4	Nos	938.00	3,752.00	
17.17	supply and installation of CAT6A data cabling with termination	15	Nos	313.00	4,695.00	
17.18	Installation Testing and Commissioning (Including Calibrated Fluke Testing and documentation)	15	Nos	500.00	7,500.00	
	ACS System- Suprema Stand-alone system, Entrances (2 Nos) & server room					
17.19	Suprema BioStation L2,Card and Pin	3	Nos	3,250.00	9,750.00	
17.2	Single Door EM Lock (600LBS) + Door Contact	3	Nos	375.00	1,125.00	
17.21	Installation and testing commissioning	3	Nos	313.00	939.00	
17.22	Cabling & Accessories	3	Nos	938.00	2,814.00	
	AV WORKS					
17.23	BOARD ROOM-12 PAX					

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
17.24	Sumsung 86 inch 4K UHD Commerical gradedisplay that features ultra-realistic picture quality and business-ready functionalities.UHD picture quality with ultra-realistic detail and clarity that amplifies content Integrated TIZEN 3.0 operating system that improves overall business performance Reinforced security measures that protect business and customer data	1	Nos	14,531.00	14,531.00	
	TV Swivel Mount Bracket- Heavy Duty type	1	Nos	563.00	563.00	
17.25	**Video Conference System**					
17.26	Neat Bar Pro - Collaboration Bar Includes Bar, Integrated Camera, Microphones and Wall, Table, and Display Mounts (NEATBARPRO-SE - Neat)	1	Nos	29,375.00	29,375.00	
17.27	Neat Pad - Controller (NEATPAD-SE)	1	Nos	3,960.00	3,960.00	
	Pulse Pro for Neat Bar Pro and Neat Pad, including Control, Care, and Cover for 3 years. Terms & conditions apply, see https://neat.no/neat-pulse-terms-and-conditions/ for complete details (PULSE-PRO-BAR2-3)	1	Nos	4,410.00	Rate Only	
17.28	**Connectivity**					
	Kramer cable cubby with HDMI, USB- C, 2D +2P	2	Nos	4,000.00	8,000.00	
17.29	Meeting Room Scheduler					
	Neat Pad - (NEATPAD-SE)	1	Nos	3,250.00	3,250.00	
17.3	Installation & Services					
17.31	Cables, Connectors & Accessories	Engg	DI	4,375.00	4,375.00	
	Installation, Configuration, Testing & Commissioning	Engg	DI	8,125.00	8,125.00	
	6-Pax- 1 Nos, 5 - Pax Meeting Room x2					

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01 Date: 06-02-2025
PROJECT : HAMPTONS INTERNATIONAL CORPORA
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBA

BILL OF QUANTITIES

MEP WORKS

SI.NO.	ITEM DESCRIPTION	QTY	UNIT	RATE	AMOUNT AED	REMARKS
17.32	Sumsung 55 inch 4K UHD Commerical gradedisplay that features ultra-realistic picture quality and business-ready functionalities.UHD picture quality with ultra-realistic detail and clarity that amplifies content Integrated TIZEN 3.0 operating system that improves overall business performance Reinforced security measures that protect business and customer data - Samsung (QB55B)	3	Nos	3,250.00	9,750.00	
17.33	Push Pull Wall bracket for above	3	Nos	625.00	1,875.00	
17.34	Neat SE - Collaboration Bar Includes Bar, Integrated Camera, Microphones and Wall, Table, and Display Mounts	3	Nos	17,213.00	51,639.00	
17.35	Kramer cable cubby with HDMI, USB- C, 2D +2P	3	Nos	4,000.00	12,000.00	
17.36	Audio Video, Control Cables and Connectors	3	DI Engg	1,063.00	3,189.00	
	Installation,Programming and Testing Commissioning Charges	3	DI Engg	1,563.00	4,689.00	
17.37	**TVs**					
17.38	Samsung 75-inches signage display QM43C-LH43QMCEBGCXUE	4	Nos	5,750.00	23,000.00	
17.39	Push Pull Wall bracket for above	4	Nos	500.00	2,000.00	
17.4	Audio Video, Control Cables and Connectors	4	Nos	438.00	1,752.00	
17.41	Installation, Testing and Commissioning Charges	4	Nos	438.00	1,752.00	
	Sub Total - IT WORKS				**284,296.00**	
	TOTAL FOR MEP				**1,267,166.00**	

REF : DI24_0025-GN-HAMPTONS-BOQ-R01
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

LOOSE FURNITURE

S/N	Description	Visual Presentation	Qty	UOM	Unit Price (AED)	Total(AED)
	Open Workstation					
1	Cluster of 6 (Face to Face) 1.Table top material: thickness:25mm core material:E1 particle board from FSC certified factory decor paper:Schattdecor from Germany PVC edge 2.Leg:steel leg 3.Flip aluminium cover and steel wire box under for wiring -Metal board attached on middle leg for cable management 4.Fabric screen panel Screen size is 200mm shorter than desk size, height 300mm - Mobile pedestal not included Note : PDU / electrification not included. Dim: 4200*1600*750 (1400*800 Per PAX) Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)	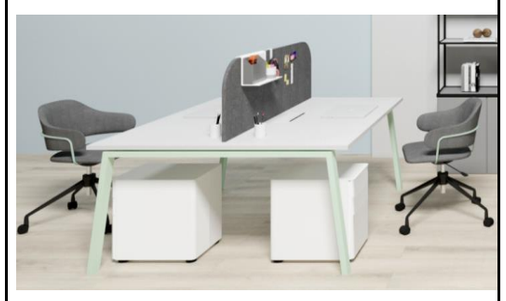 	5	EA	5,262.00	26,310.00
2	Cluster of 8 (Face to Face) 1.Table top material: thickness:25mm core material:E1 particle board from FSC certified factory decor paper:Schattdecor from Germany PVC edge 2.Leg:steel leg 3.Flip aluminium cover and steel wire box under for wiring -Metal board attached on middle leg for cable management 4.Fabric screen panel Screen size is 200mm shorter than desk size, height 300mm - Mobile pedestal not included Note : PDU / electrification not included. Dim: 5600*1600 (1400*800 Per PAX) Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)	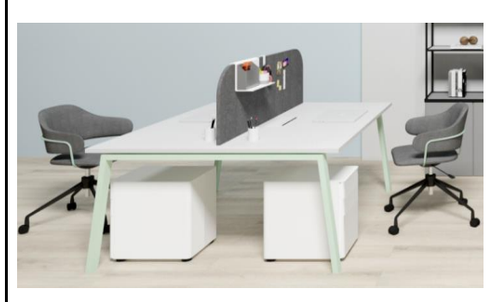 	4	EA	6,981.00	27,924.00
3	Cluster of 4 (Face to Face) 1.Table top material: thickness:25mm core material:E1 particle board from FSC certified factory decor paper:Schattdecor from Germany PVC edge 2.Leg:steel leg 3.Flip aluminium cover and steel wire box under for wiring -Metal board attached on middle leg for cable management 4.Fabric screen panel Screen size is 200mm shorter than desk size, height 300mm Note : PDU / electrification not included. Dim: 2800*1600 (1400*800 Per PAX) Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)	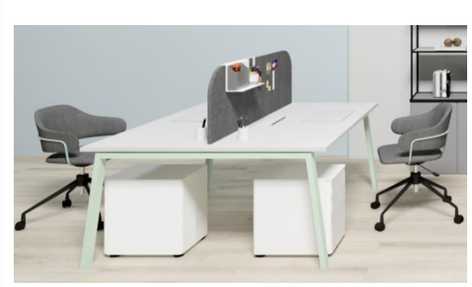	2	EA	3,548.00	7,096.00

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

LOOSE FURNITURE

S/N	Description	Visual Presentation	Qty	UOM	Unit Price (AED)	Total(AED)
4	**PDU for workstation** Silver Aluminum Profile 1.5U with holding angles 2 x UK Power Sockets - 3 Pin BS, 230V 1 x Data Cat6A RJ 45 with 3 meter data cable 1 x USB 2.0 with cable (Type A)- for Data transferring 1 x Twin USB (Type A+C) fast charging (30W) On/Off Power Switch 1 x 3 meter starter lead, female GST18i to UK Plug BS1363,13A fused (Wieland type connector) Origin : FarEast Delivery : 11-12 weeks Warranty : Five (5) years (Against Manufacturing Defects		70	EA	336.00	23,520.00
	Cabinet with planter box	**Under joinery scope**				
5	Pedestal Super fine cold rolled steel plate, 0.8mm thickness, 10 times anti-rust treatment, automatic powder coating, three full-extension drawers, with lock Dim: 393×500×600 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		70	EA	352.00	24,640.00
6	Task Chair -Material:mesh back&fabric seat -Synchronized-tilting system with lock, lockable at 3 different positions *Lumbar support *Armrest with 2 D.O.F. (Degree Of Freedom) Adjustment -Chrome base -White frame Dim: 640*480*1010-1100 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		70	EA	929.00	65,030.00
	Phone booth					

REF : DI24_0025-GN-HAMPTONS-BOQ-R01
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

LOOSE FURNITURE

S/N	Description	Visual Presentation	Qty	UOM	Unit Price (AED)	Total(AED)
7	Phone Booth Frame: 6063 aviation aluminnum alloy Glass: 10mm ultra white tempered glass , 4+4 laminated door glass Wall: 6063 aviation aluminnum alloy +1.0mm steel surface/Gabriel upholstery + acoustic package + 13mm polyester panel + G350 noise-reducing fabric Roof: 6063 aviation aluminnum alloy + 1.0mm steel surface + acoustic package + polyester panel + G350 noise-reducingfabric Bottom plate: E0 level 25+9mm solid wood plywood + black PVC edge banding + steel frame +25mm adjusting /feet + polyester carpet Metal frame in powder coating finish Including 1pcs of melamine tabletop Power Configuration 1 power track（1 AC） 1 wireless charging AC 220V 1 Bar stool included Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)	 	2	EA	19,830.00	39,660.00
	Built-in Phone booth - 4 Nos	**Under joinery scope**				
8	Arm chair Fabric upholstered, solid wooden leg North American ash Dim: 580*600*810 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		4	EA	1,582.00	6,328.00
	Reception					
9	Receptionist Chair -Material: full mesh back and mesh seat, imported from Korea with adjustable headrest and coat hanger -Synchronized-tilting system with lock, lockable at 3 different positions *Lumbar support *Fixed armrest -Height adjustable -Chrome base -White frame Dim: 670*590*1155-1250 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		2	EA	990.00	1,980.00
10	**Lounge Seating** Custom Made sofa made of wooden structure with high density foam and upholstered with fabrics from our standard manufacturers range Dim: 2340*1070*730mm H Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)	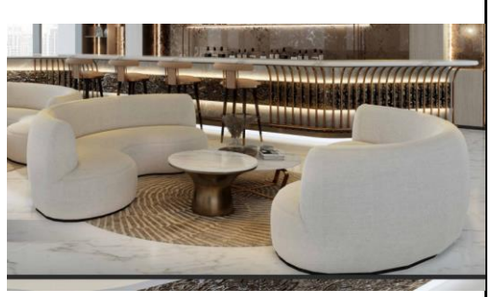	6	EA	4,567.00	27,402.00

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

LOOSE FURNITURE

S/N	Description	Visual Presentation	Qty	UOM	Unit Price (AED)	Total(AED)
11	**Center Table - Round** Custom Made Center Table top in volakas marble and wooden base in antique bronze paint finish. Dim: 800*H400 Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)		1	EA	3,278.00	3,278.00
12	**Lounge Arm chair** Custom Made Arm Chair made of wooden structure with high density foam and upholstered with leather with aluminum leg Dim: 940*900*900mm H (Appx) Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)	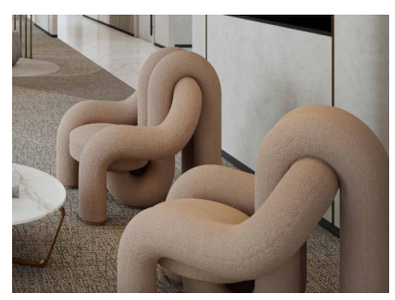	2	EA	4,308.00	8,616.00
13	**Center table - Round** Custom Made Center Table with top in volakas marble and wooden base in antique bronze paint finish. Dim: 800*H400 Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)		1	EA	3,278.00	3,278.00
	Meeting Room					
14	Meeting table (6 Pax) 1.Table top material: thickness:25mm core material:E1 particle board from FSC certified factory decor paper:Schattdecor from Germany PVC edge 2.Leg:steel leg 3.Flip aluminium cover and steel wire box under for wiring Note : PDU / electrification not included. Dim: 2400*1200*750 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)	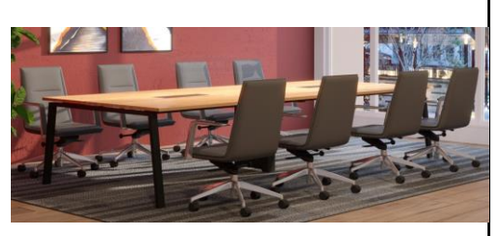 Concept image	1	EA	1,977.00	1,977.00
15	**Motorized Rotary** (For high meeting table 2200*1000mm) Aluminum based plain surface when closed; Frame/Cover and side parts Color: Black ; Motorized frame opening - switch button ; Finish: Black or Silver 2 x UK Power Sockets -3 Pin BS 2 x Data Cat6A RJ45 with 3 meter cable 1 x HDMI with cable 1 x Twin USB Power Charger (Type A+C) 1 x Wireless Charger 3 meter power cable with UK plug Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)	 	1	EA	1,260.00	1,260.00

REF : DI24_0025-GN-HAMPTONS-BOQ-R01
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

LOOSE FURNITURE

S/N	Description	Visual Presentation	Qty	UOM	Unit Price (AED)	Total(AED)
16	Meeting chair Fabric upholstered back and seat Powder coated aluminium leg 4 star base Fixed height Dim: 600*600*835 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		6	EA	1,127.00	6,762.00
	Board Room					
	Meeting Table	Under joinery scope				
17	Meeting chair 1.High quality PU leather back& seat 2.Fixed aluminium armrest with soft PU pad 3.Imported Donati mechanism from Italy, lockable at 5 different positions 4. Aluminium leg Dim: 680*660*1130-1190 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		12	EA	2,208.00	26,496.00
18	**Motorized Rotary** (For high meeting table 2200*1000mm) Aluminum based plain surface when closed; Frame/Cover and side parts Color: Black ; Motorized frame opening - switch button ; Finish: Black or Silver 2 x UK Power Sockets -3 Pin BS 2 x Data Cat6A RJ45 with 3 meter cable 1 x HDMI with cable 1 x Twin USB Power Charger (Type A+C) 1 x Wireless Charger 3 meter power cable with UK plug Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)	 	2	EA	1,260.00	2,520.00
	Meeting Room					
19	Meeting Table (5 Pax) 1.Table top material: thickness:25mm core material:E1 particle board from FSC certified factory decor paper:Schattdecor from Germany PVC edge 2.Leg:steel leg 3.Flip aluminium cover and steel wire box under for wiring Note : PDU / electrification not included. Dim: 2200*900*750 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)	 Concept image	2	EA	1,977.00	3,954.00

REF : DI24_0025-GN-HAMPTONS-BOQ-R01
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

LOOSE FURNITURE

S/N	Description	Visual Presentation	Qty	UOM	Unit Price (AED)	Total(AED)
20	**Motorized Rotary** (For high meeting table 2200*1000mm) Aluminum based plain surface when closed; Frame/Cover and side parts Color: Black ; Motorized frame opening - switch button ; Finish: Black or Silver 2 x UK Power Sockets -3 Pin BS 2 x Data Cat6A RJ45 with 3 meter cable 1 x HDMI with cable 1 x Twin USB Power Charger (Type A+C) 1 x Wireless Charger 3 meter power cable with UK plug Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		2	EA	1,260.00	2,520.00
21	Meeting Chair Fabric upholstered back and seat Powder coated aluminium leg 4 star base Fixed height Dim: 600*600*835 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		10	EA	1,127.00	11,270.00
	Main Reception					
22	Receptionist Chair -Material: full mesh back and mesh seat, imported from Korea with adjustable headrest and coat hanger -Synchronized-tilting system with lock, lockable at 3 different positions *Lumber support *Fixed armrest -Height adjustable -Chrome base -White frame Dim: 670*590*1155-1250 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		3	EA	990.00	2,970.00
23	**Lounge chair** Custom Made: wooden structure with high density foam and upholstered in fabric from our standard manufacturers range Dim: W900*900D*450/600mmH (Approx) Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)		4	EA	1,936.00	7,744.00
24	High chair Fabric or PU leather upholstered, powder coated steel leg Dim: 425*420*900 Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		4	EA	688.00	2,752.00

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

LOOSE FURNITURE

S/N	Description	Visual Presentation	Qty	UOM	Unit Price (AED)	Total(AED)
25	**Sofa seater** Custom Made sofa made of wooden structure with high density foam and upholstered with fabric/leather with powder coated steel leg. Dim: L 2000*D600*H650mm (Appx) Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)		2	EA	4,834.00	9,668.00
26	**Lounge Seating** Custom Made sofa made of wooden structure with high density foam and upholstered with fabrics Dim: 2340*1070*730mm H Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)	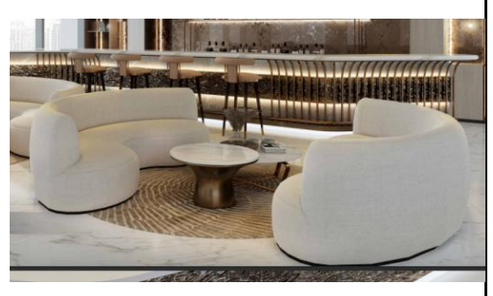	6	EA	4,567.00	27,402.00
27	**Lounge Arm Chair** Custom Made Arm Chair made of wooden structure with high density foam and upholstered with leather with aluminum leg Dim: 940*900*900mm H (Appx) Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)		2	EA	4,308.00	8,616.00
28	**Lounge Arm Chair** Custom Made Arm Chair made of wooden structure with high density foam and upholstered with leather with aluminum leg Dim: 940*900*900mm H (Appx) Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)	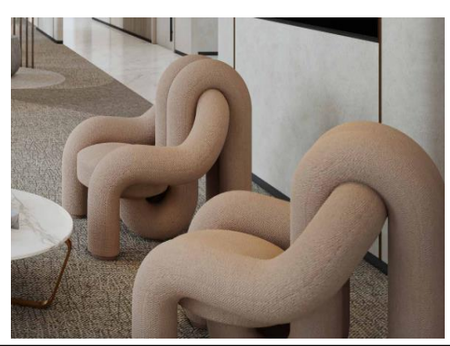	4	EA	4,308.00	17,232.00
29	**Center Table - Round** Custom Made Center Table top in volakas marble and wooden base in antique bronze paint finish. Dim: 800*H400 Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)		4	EA	3,278.00	13,112.00
30	**Center Table - Round** Custom Made Center Table top in volakas marble and base ms powder coated finish. Dim: Dia 800*400 + H400*H550mm Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)	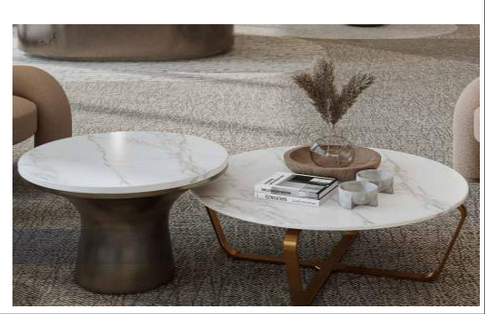	3	Set	4,657.00	13,971.00

REF : DI24_0025-GN-HAMPTONS-BOQ-R01
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

LOOSE FURNITURE

S/N	Description	Visual Presentation	Qty	UOM	Unit Price (AED)	Total(AED)
31	**Round Table - Side Table** Custom Made side table top in volakas marble and wooden base in antique bronze paint finish. Dim: D400*550 Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)		2	EA	2,519.00	5,038.00
32	**Lounge Seating - Customized** curve sofa made of wooden structure with high density foam and upholstered with fabric/ leather.c from our standard manufacturers range Dim: 2100*1200*760 Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)		2	EA	4,440.00	8,880.00
33	**Lounge Arm Chair** Custom Made Arm Chair made of wooden structure with high density foam and upholstered with leather with aluminum leg Dim: 940*900*900mm H (Appx) Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)		6	EA	4,308.00	25,848.00
34	**Center Table - Round (set)** Custom Made Center Table top in volakas marble and base ms powder coated finish. Dim: Dia 800*400 + H400*H550mm Origin : DI-U.AE. Delivery : 11-12 weeks Warranty : 2 Years (Against Manufacturing Defects)		2	Set	4,657.00	9,314.00
	Storage					
35	Cabinet Melamine board cabinet with swing doors Adjustable shelf inside, with lock Dim: 2400*400*2100H Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		4	EA	4,568.00	18,272.00
36	Cabinet Melamine board cabinet with swing doors Adjustable shelf inside, with lock Dim: 1800*400*2100H Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		1	EA	3,728.00	3,728.00
37	Cabinet Melamine board cabinet with swing doors Adjustable shelf inside, with lock Dim: 1200*400*2100H Origin : FarEast Delivery : 11-12 weeks Warranty : 5 Years (Against Manufacturing Defects)		4	EA	2,521.00	10,084.00
					Total Amount :	**506,452.00**
					VAT @ 5% (AED)	25,322.60

ديزاين انفنيتي ش.ذ.م.م
P.O. Box: 62522
DUBAI - U.A.E.
DESIGN INFINITY L.L.C

REF : DI24_0025-GN-HAMPTONS-BOQ-R01
PROJECT : HAMPTONS INTERNATIONAL CORPORATE OFFICE
LOCATION: LVL 01, PARK HEIGHTS SQUARE, DUBAI, UAE

BILL OF QUANTITIES

LOOSE FURNITURE

S/N	Description	Visual Presentation	Qty	UOM	Unit Price (AED)	Total(AED)

TERMS AND CONDITIONS

VAT: VAT @ 5% applicable as per FTA UAE.
Payment : 50% advance along with order confirmation, 50% prior to material delivery
Delivery and completion payments to be released within 15 days from the date of invoice submission.
Delivery: As mentioned against each line items weeks from the date of order, finishes approval, and receipt of advance payment (excluding seasonal holidays at the
Validity : 30 Days
General Note : All prices are net based on the total quantity as per above quotation. If the quantity is reduced the price is liable to vary and need to reconfirm by Design Infinity LLC, prior to finalizing the order. Item/s not mention and item/s quantity not included in the above quotation will be additional.

For Design Infinity LLC

Geetha Nayak
Managing Partner

CONTACT PERSON

GEETHA NAYAK
MANAGING PARTNER

CONTACT DETAILS:

T: 04 379 5902

M: 050 146 7608

E: geetha@design-infinity.com

DUBAI (HEAD OFFICE) ADDRESS:
UNIT 201-203, 212-213 & 301-303
HAMSAH BUILDING, O-BLOCK
PO BOX 62522, AL KARAMA
DUBAI, UNITED ARAB EMIRATES
T: 04 379 5902

DUBAI BRANCH – OFFICE & WAREHOUSE
JOINERY, GLASS & METAL DIVISION
DUBAI INVESTMENT PARK 2
PLOT NUMBER: 597-813
TEL: 971 4 321 6946

ABU DHABI OFFICE
OFFICE NO. M1, P/181 BUILDING
PO BOX 62560, AL MUROOR
ABU DHABI, UNITED ARAB EMIRATES
T: 02 448 2286

WWW.DESIGN-INFINITY.COM