Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)369710 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT BUDGET COSTING

for

NSATS DIFC

REF NO. MU-RP/E0091/NSATS/2023

LEVEL 2, BURJ DAMAN TOWER
DUBAI, UAE

FITOUT & MEP WORKS

REVISION 1

Prepared by: **Evolve Interiors LLC**

Prepared on: 13 July 2023

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

GENERAL SUMMARY

ITEM NO.	SCOPE OF WORK	AMOUNT	
1.0	PRELIMINARIES	AED	49,955.00
2.0	CIVIL WORKS	AED	6,695.00
3.0	FLOORING WORKS	AED	98,325.00
4.0	BASE FLOOR SKIRTING	AED	8,250.00
5.0	FALSE CEILING	AED	65,785.00
6.0	WALLS AND PARTITION WORKS	AED	81,390.00
7.0	WALL FINISHES	AED	126,728.00
8.0	DOORS	AED	101,990.00
9.0	CUSTOM JOINERY	AED	158,355.00
10.0	LIGHTING FIXTURE	AED	73,840.00
11.0	ELECTRICAL WORKS	AED	92,015.00
12.0	FIRE FIGHTING AND FIRE ALARM WORKS	AED	169,595.00
13.0	HVAC WORKS	AED	296,300.00
14.0	COLD WATER, SANITARY & DRAINAGE SYSTEM	AED	18,983.00
15.0	MISCELLANEOUS	AED	26,630.00
16.0	FURNITURE	AED	123,860.00
	GRAND TOTAL (EXCLUDING VAT):	**AED**	**1,498,696.00**

PERCENTAGE REPRESENTATION

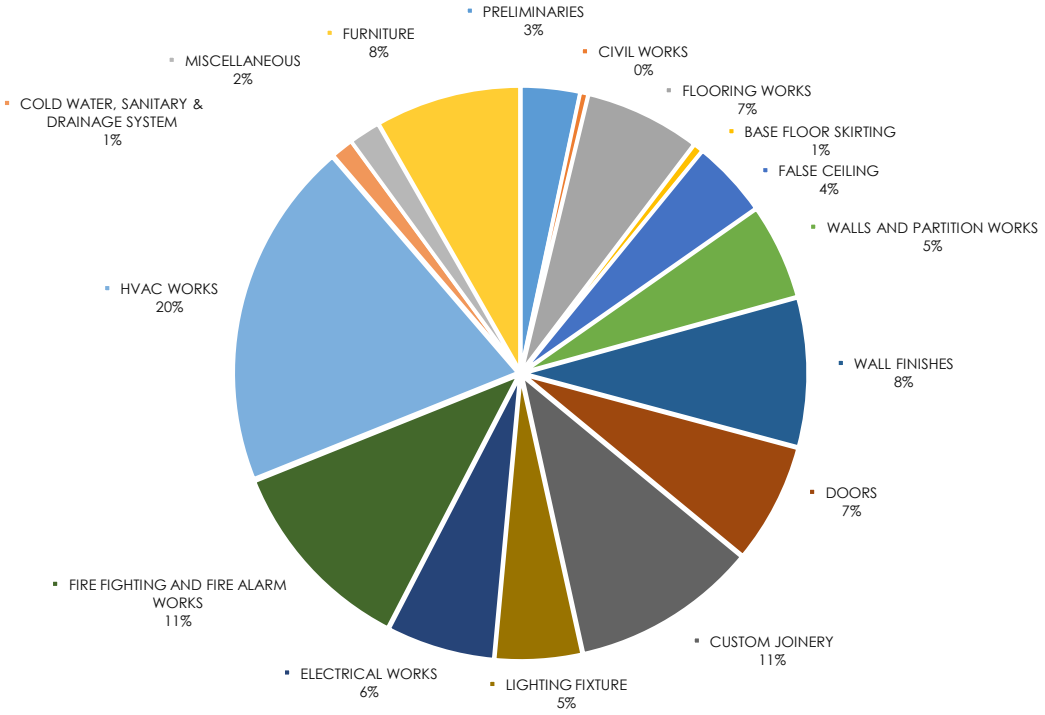

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
1	PRELIMINARIES					
1.01	**Drawing Fees**	Preparation of Architectural & Engineering drawings in order to acquire approvals from concerned Authorities & Building Management, including coordination charges for getting the approvals.	Ls	1	10,300.00	10,300.00
1.02	**Authority Fees**	All Authority Approval fees, deposit and Building management fees to be paid by the client directly as per the actual receipt (Including VAT). Note: Security Deposits to be paid by client. Provisional sum considered will be based as per actual receipt.				
	a	Building Management Fees	Ls	1	30,900.00	30,900.00
	b	DDA	Ls			
	c	DCD Inspection fees	Ls			
	d	DCD Submission fees	Ls			
	e	24x7 DCD Panel	Ls			
	f	DEWA	Ls			
	g	Temporary water & power connection charges during fit out works	Ls			
1.03	**Mobilization Fees**	Mobilization of required manpower and resources to complete the works, including regular cleaning and keeping site safe.	Ls	1	5,150.00	5,150.00
1.04	**Site Protection**	Supply and installation of protection materials using to avoid damages on existing building finishes.				
1.05	**Insurance Policy**	Providing CAR insurance policy.	Ls	1	3,605.00	3,605.00
					SUBTOTAL FOR PRELIMINARIES	**49,955.00**

2	CIVIL WORKS					
2.01	**Raised Access Flooring Removal**	Removal of existing raised access floor to allow installation of screed. Location: Proposed Powder Room	Item	1		6,695.00
2.02	**Ceiling Cutting and Closing**	Ceiling cutting at common corridor to allow connection of exhaust duct and closing the same including painting. Location: Common Corridor	Item	1		
2.03	**Flooring Removal and Reinstallation**	Removal of raised access floor + carpet to allow connection of drainage and reinstalling the same. Location: Common Corridor	Item	1		
2.04	**Door Removal**	Removal of exisitng wooden door and handing over to client for reinstatement purposes. Location: Entrance	Item	1		
					SUBTOTAL FOR CIVIL WORKS	**6,695.00**

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
3	FLOORING WORKS					
3.01	**HPL Raised Access Flooring**	Supply and installation of High Pressure Laminate Raised Access Floor, including cutting of raised flooring for floorbox installation complete with all necessary materials for fixing. Product: HPL Raised Access Floor Grade: FS 800 Panel Size : 600 mm x 600 mm x 35 mm Note: Existing Pedestal to be reused, Grounding is considered Location: Server Room	m²	4	360.00	1,440.00
3.02	**Screeding with Polysterene Foam**	Supply and installation of screeding with polysterene foam including necessary materials for fixing. Height: 500mm Location: Powder Room	m²	4	570.00	2,280.00
3.03	**Carpet Tiles**	Supply and installation of carpet tiles including all necessary materials for fixing. Size: 500mm x 500mm Location: Sr. Executive 1&2, an d Demo Presentation Room	m²	86	145.00	12,470.00
3.04	**LVT Type 1**	Supply and installation of luxury vinyl tile planks (concrete effect) flooring including all necessary materials for fixing. Location: Reception, Pantry, Corridor and Open Workstation	m²	77	145.00	11,165.00
3.05	**LVT Type 2 (Herringbone)**	Supply and installation of luxury vinyl tile planks (wooden effect) in herringbone pattern flooring including all necessary materials for fixing. Location: Director 1&2, Meeting and Lounge	m²	123	145.00	17,835.00
3.06	**Ceramic Tiles**	Supply and installation of ceramic tiles with color matching grout including necessary materials for fixing. Location: Powder Room	m²	4	260.00	1,040.00
3.07	**Plywood Underlay**	Supply and installation of plywood underlay prior to installation of LVT including all necessary materials for fixing. Location: LVT Floor Area	m²	204	50.00	10,200.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
3.08	**Metal Profile**	Supply and installation SS metal profile between different floor finishes. Location: Between Different Floor Finish	Item	10	78.00	780.00
3.09	**Door Threshold**	Supply and installation marble door threshold. Location: Powder Room	Item	1	360.00	360.00
3.10	**Waterproofing (Floors and Walls)**	Supply and installation of 2 coats cementitious waterproofing on flooring and on walls up to 500mm high, including all necessary materials for fixing. Location: Powder Room and Pantry	m²	13	115.00	1,495.00
3.11	**Elevated Wooden Platform (150mm H)**	Fabricate, supply and installation of elevated wooden platform using wooden battens support enclosed with plywood on top including all necessary materials for fixing. Height: 150mm Location: Demo / Presentation	m²	24	825.00	19,800.00
a	**Upstand / Step to Close the Gap (150mm H)**	Fabricate, supply and installation of upstand /step to close the gap upon raising the floor using MDF in laminate finish including all necessary materials for fixing. Height: 150mm Location: Elevated Wooden Platform 150mm H	Lm	12	155.00	1,860.00
3.12	**Elevated Wooden Platform (300mm H)**	Supply and installation of 2 coats cementitious waterproofing on flooring and on walls up to 500mm high, including all necessary materials for fixing. Height: 300mm Location: Demo / Presentation	m²	14	1,080.00	15,120.00
a	**Upstand / Step to Close the Gap (150mm H)**	Fabricate, supply and installation of upstand /step to close the gap upon raising the floor using MDF in laminate finish including all necessary materials for fixing. Height: 300mm Location: Elevated Wooden Platform 300mm H	m²	8	310.00	2,480.00
					SUBTOTAL FOR FLOORING WORKS	**98,325.00**

4	BASE FLOOR SKIRTING					
4.01	**MDF PU Lacquered Skirting**	Supply and installation of 50mm high MDF PU lacquered paint finish skirting onto all proposed gypsum partitions. Location: Existing and New Walls amd Ccloumns	LM	165	50.00	8,250.00
					SUBTOTAL FOR BASE FLOOR SKIRTING	**8,250.00**

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
5	FALSE CEILING					
5.01	**Gypsum Ceiling Painted**	Supply and installation of 12.5mm thick regular gypsum ceiling including suspension system and painting with Jotun Fenomastic paint. Location: General Area	m²	252	145.00	36,540.00
5.02	**MR Gypsum Ceiling Painted**	Supply and installation of 12.5mm thick moisture-resistant gypsum ceiling including suspension system and painting with Jotun Fenomastic paint. Location: Powder Room	m²	4	150.00	600.00
5.03	**60x60 Gypsum Ceiling Tiles**	Supply and installation of 60x60cm gypsum ceiling tiles including suspension system with painting in Jotun Fenomastic paint. Suspension: Lay-in system Location: Server Room, Storage	m²	30	125.00	3,750.00
5.04	**Gypsum Ceiling Cove**	Supply and installation of gypsum ceiling cove with provision for LED light including suspension system and painting with Jotun Fenomastic paint. Location: General Area	Lm	158	115.00	18,170.00
a	**Perimeter Trim on Cove** **(Removed)**	Fabricate, supply and installation of perimeter trim on gypsum ceiling cove in MDF PU lacquered paint finish. Location: Gypsum Ceiling Cove at Director 1&2 and Meeting & Lounge 	Lm	70	-	Item Removed for VE
5.05	**Window Pelmets**	Supply and installation of gypsum pelmet in Jotun Fenomastic paint finished for the roller blinds. Location: Existing Window Glazing	Lm	33	125.00	4,125.00
5.06	**Access Panel**	Supply and installation of gypsum ceiling hinged type access panels. Size: 600x600 Location: As per MEP Requirement	Nos	10	260.00	2,600.00
					SUBTOTAL FOR FALSE CEILING	**65,785.00**

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
6	WALLS AND PARTITION WORKS					
6.01	**Regular Gypsum Partition Raised Floor to Slab**	Supply and installation of 100mm thick drywall partitions composed of steel frames covered with single layer of 12.5mm regular gypsum boards on both faces with 50 mm (35kg/m3) mineral Rockwool insulation inside, with one coat of primer ready to receive paint finish. Brand: Knauf Height: 3600mm Location: As per Layout	m²	206	135.00	27,810.00
6.02	**Fire Rated Gypsum Partition Raised Floor to Slab**	Supply and installation of 100mm thick drywall partitions composed of steel frames covered with single layer of 12.5mm fire rated gypsum boards on both faces with 50 mm (35kg/m3) mineral Rockwool insulation inside, with one coat of primer ready to receive paint finish. Brand: Knauf Height: 3600mm Location: Server Room and Demise Wall where the Door to be closed	m²	26	145.00	3,770.00
6.03	**Calcium Silicate Partition Slab to Slab**	Supply and installation of 100mm thick drywall partitions composed of steel frames covered with single layer of 12mm calcium silicate partition, with one coat of primer ready to take paint finish. Height: 4100mm Location: Powder Room	m²	16	145.00	2,320.00
6.04	**Gypsum Cladding Raised Floor to Ceiling Level**	Supply and installation of 70mm thick drywall cladding composed of steel frames covered with single layer of 12.5mm regular gypsum boards on one face, with one coat of primer ready to take paint finish. Brand: Knauf or Equivalent Height: 2900mm Location: Existing Walls and Columns	m²	133	105.00	13,965.00
6.05	**Gypsum Cladding Above Exposed Windwow Sill**	Supply and installation of 70mm thick drywall cladding composed of steel frames covered with single layer of 12.5mm regular gypsum boards on one face, with one coat of primer ready to take paint finish. Brand: Knauf or Equivalent Height: 800mm Location: Above Exposed Windwow Sill	m²	27	105.00	2,835.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
6.06	**Calcium Silicate Cladding Raised Floor to Ceiling Level**	Supply and installation of 70mm thick drywall cladding composed of steel frames covered with single layer of 12mm calcium silicate boards on one face, with one coat of primer ready to take paint finish. Height: 2900mm Location: Powder Room and Pantry	m²	18	115.00	2,070.00
6.07	**Baffle Wall**	Supply and installation of 100mm thick drywall partitions composed of steel frames covered with single layer of 12.5mm regular gypsum boards on both faces with 50 mm (35kg/m3) mineral Rockwool insulation inside, with one coat of primer ready to receive paint finish. Brand: Knauf Height: 700mm Location: Above Glass Doors & Partition	m²	18	135.00	2,430.00
6.08	**TV Support**	Supply and installation of MDF support for TV screen on gypsum walls including all necessary materials for fixing. *Note: TV not included.* Location: Director 1&2 and Meeting & Lounge	Nos	3	360.00	1,080.00
6.09	**Single Glazed Glass Partition**	Supply and installation of single glazed glass partition using 10mm thick tempered glass, butt- jointed and frames in black powder coated finish. Height: 2900mm Location: As per Layout	m²	54	465.00	25,110.00
					SUBTOTAL FOR WALLS AND PARTITION WORKS	**81,390.00**

7	WALL FINISHES					
7.01	**Glass Manifestation**	Supply and installation of glass manifestation. Height: 1200mm Location: Glass Doors & Partitions	m²	29	113.00	3,277.00
7.02	**Wall Paint** **(Additional Quantity due to VE)**	Supply and applying fenomastic paint as per approved colour. Brand: Jotun Height: 1300mm and 2900mm Location: Open Workstation Area, Left Side Wall of Demo/Presentation, Storage and Recepetion	m²	244	39.00	9,516.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
7.03	**Acoustic Felt Cladding** **(Quantity Reduced)**	Supply and installation of acoustic felt cladding woth horozontal and vertical grooves fixing with adhesive on the wall. Panel Size: 1200mm x 2400mm Color: To be Selected Location: Demo/Presentation (ScreenWall) and Sr. Executive 1&2	m²	40	670.00	26,800.00
7.04	**Wall Paper** **(Additional Quantity due to VE)**	Supply and installation of wall paper including wall preparation and all necessary materials for fixing. Height: 2900mm Location: Director 1&2, Sr. Executive 1&2, and Reception (Back of Perfoated Metal Panels and Wooden Slats)	m²	130	125.00	16,250.00
7.05	**Textured Paint** **(Removed)**	Supply and application of concrete textured paint finish as per approved color including surface preparation. Brand: Jotun Height: 1300mm and 2900mm Location: Open Workstation Area	m²	20	165.00	Item Changed to Normal Paint for VE
7.06	**Backpainted Glass**	Fabricate, supply and installation of6mm thick backpainted glass with MDF backing including all necessary materials for fixing. Height: 600mm @Pantry Backsplash Height: 1700mm @Demo/Presentation Location: Pantry and Demo/Presentation	m²	7	620.00	4,340.00
7.07	**Ceramic Tile**	Supply and installation of ceramic tile with color matching grout including mortar to be directly fixed to wall. Height: 2900mm Location: Powder Room	m²	19	260.00	4,940.00
7.08	**Wooden Slats** **(Quantity Reduced)**	Fabricate, supply and installation of customized veneer slats in MDF wooden laminate finish cladding with necessary supports. Location: Director 1 and Reception	m²	27	1,290.00	34,830.00
7.09	**Wooden Cladding** **(Quantity Reduced)**	Fabricate, supply and installation of wooden cladding in MDF laminate finish including necessary materials for fixing. Location: Director 1&2, Meeting & Lounge and Columns at Meeting and Lounge	m²	24	825.00	19,800.00
7.10	**CNC Perforated Metal Cladding** **(Removed)**	Fabricate, supply and installation of powder coated metal cladding CNC cut to form world map including all necessary materials for fixing. Location: Reception	m²	7	2,215.00	Item Removed for VE

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
7.11	**Green Wall**	Supply and installation of artificial green wall with a hook fastener tape for installation. Height: 2900mm Location: Director 1	m²	9	775.00	6,975.00
					SUBTOTAL FOR WALL FINISHES	**126,728.00**

8	DOORS					
8.01	**Non Fire Rated Single Leaf Swing Wooden Door Concealed**	Supply and installation of single leaf non fire rated wooden swing door with standard ironmongeries. Size: 900mm x 2400mm H Location: Store Rooms, Powder Room, Director Room to Meeting and Lounge	Nos	4	4,120.00	16,480.00
8.02	**Non Fire Rated Single Leaf Swing Wooden Door**	Supply and installation of single leaf non fire rated wooden swing door in veneer finish with standard ironmongeries. Size: 900mm x 2400mm H Location: Pantry	No	1	3,915.00	3,915.00
8.03	**Fire Rated Single Leaf Swing Wooden Door**	Supply and installation of single leaf 1 hour fire rated wooden swing door in veneer finish with standard ironmongeries. Size: 900mm x 2400mm H Location: Server Room	No	1	5,150.00	5,150.00
8.04	**Glass Door (Single Leaf Swing)**	Supply and installation of single leaf swing door using 10mm thick glass with floor machine, handle and lock with all necessary materials for fixing. Size: 900mm W x 2900mm H Location: Access Doors (Reception, Corridor to Workstation and Demo/Presentation)	Nos	3	3,915.00	11,745.00
8.05	**Glass Door (Single Leaf Sliding - Framed)**	Supply and installation of framed single leaf sliding door using 10mm thick glass with required track, handle and lock with all necessary materials for fixing. Size: 900mm W x 2900mm H Location: Director 1&2, and Sr. Executive 1&2	Nos	4	4,945.00	19,780.00
	a	Top Support	Nos	4	775.00	3,100.00
8.06	**Glass Door (Double Leaf Sliding - Framed)**	Supply and installation of framed double leaf sliding door using 10mm thick glass with required track, handle and lock with all necessary materials for fixing. Size: 1800mm W x 2900mm H Location: Meeting & Lounge	No	1	9,890.00	9,890.00
	a	Top Support	No	1	1,545.00	1,545.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
8.07	**Fire Rated Glass Door (Double Leaf Swing)**	Supply and installation of 1 Hour Fire Rated double leaf swing door with floor machine, handle and lock with all necessary materials for fixing. Size: 1800mm W x 2200mm H Location: Main Entrance	No	1	30,385.00	30,385.00
					SUBTOTAL FOR DOORS	**101,990.00**

9	CUSTOM JOINERY					
9.01	**Reception Counter**	Fabricate, supply and installation of reception counter, table in PU lacquered paint finish, inside drawres in laminate shutters + melamine carcass, front fascia accent in wooden veneer finish including necessary materials for fixing. Size: 1600mm L x 600mm W x 1000mm H 	No	1	8,000.00	8,000.00
9.02	**Open Workstation Desk**	Fabricate, supply and installation of workstation desks in wooden veneer top and legs with wooden veneer dado panel directly fixed to the wall including necessary materials for fixing. Note: Mobile Pedestal considered as loose furniture Size: 1400mm L x 700mm D x 750mm H 	No	6	3,500.00	21,000.00
9.03	**Demo/Presentation Desk**	Fabricate, supply and installation of workstation desks in wooden veneer top, legs and modesty panel including necessary materials for fixing. 				
	a	Size: 2300mm L x 700mm D x 750mm H	No	1	8,050.00	8,050.00
	b	Size: 7100mm Curved L x 600mm D x 750mm H	No	1	26,980.00	26,980.00
	c	Size: 3300mm Curved L x 600mm D x 750mm H	No	1	12,540.00	12,540.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
9.04	**Pantry Counter**	Fabricate, supply and installation of pantry counter with solid surface top, base and overhead cabinet in laminate shutters + melamine carcass including standard ironmongeries. Size: 2000mm L x 600/450mm W x 240mm H	No	1	9,000.00	9,000.00
9.05	**Coffee Counter**	Fabricate, supply and installation of coffee counter with solid surface top, base cabinet in PU lacquered slats shutters + melamine carcass, overhead cabinet in laminate shutters + melamine carcass including standard ironmongeries. Size: 3200mm L x 650/450mm W x 2400mm H 	No	1	16,000.00	16,000.00
9.06	**TV Wall Unit**	Fabricate, supply and installation of TV Wall Unit, Open shelving in overall PU lacquered paint finish, back of TV in wall paper wrapped with wall paper, over hung cabinet in PU lacquered slats shutters + melamine carcass including necessary materials for fixing. Open Shelve: 600mm L x 250mm D x 2900mm H Back of TV: 1200mm L x 1500mm H Cabinet: 1200mm L x 250mm D x 500mm H Location: Meeting and Lounge 	No	1	7,500.00	7,500.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
9.07	**Working Desk Unit** **(Backing changed to Paint)**	Fabricate, supply and installation of working desk in wooden veneer top diractly fixed to archway in PU lacquered paint finish, overhead cabinet in laminate shutters + melamine carcass, open shelving in laminate finish. Size: 3250mm L x 700mm D x 2900mm H 	Nos	2	14,935.00	29,870.00
9.08	**Vanity Counter**	Fabricate, supply and installation of vanity conter in solid surface top, with open legde storage including mirror and all necessary materials for fixing. Size: 1430mm L x 500mm W Location: Director 1	No	1	4,350.00	4,350.00
9.09	**Storage Unit** **(Half Full Height + Half Lowheight + Open Shelving**	Fabricate, supply and installation of storage unit in laminate shutters + melamine with standard ironmongeries including necessady materials for fixing. Size: 3910mm L x 600mm D x 2900mm H	No	1	15,065.00	15,065.00
					SUBTOTAL FOR CUSTOM JOINERY	**158,355.00**

10	LIGHTING FIXTURE					
10.01	**Down Light**	Supply and installallation of down lights. Location: Demo / Presentation	Nos	22	265.00	5,830.00
10.02	**Down Light**	Supply and installation of down light. Location: Meeting and Lounge	Nos	14	265.00	3,710.00
10.03	**Floor Light**	Supply and installation of floor light. Location: Meeting and Lounge	No	1	2,575.00	2,575.00
10.04	**Down Light**	Supply and installation of down light. Location: Director 2	Nos	12	265.00	3,180.00
10.05	**Linear Light**	Supply and installation of decotarive linear light Location: Director 2	No	1	1,765.00	1,765.00
10.06	**Table Lamp**	Supply and installation of table lamp. Location: Director 2	No	1	1,180.00	1,180.00
10.07	**Down Light**	Supply and installation of down light. Location: Director 2	Nos	16	265.00	4,240.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
10.08	**Linear Light**	Supply and installation of decorative linear light. Location: Director 1	No	1	1,620.00	1,620.00
10.09	**Pendant Light**	Supply and installation of decorative pendant light. Location: Director 1	Set	1	2,650.00	2,650.00
10.10	**Table Lamp**	Supply and installation of table lamp. Location: Director 1	No	1	1,180.00	1,180.00
10.11	**Wall Light**	Supply and installation of wall light. Location: Open Workstation	Nos	6	960.00	5,760.00
10.12	**Down Light**	Supply and installation of down light. Location: Open Workstation	Nos	10	265.00	2,650.00
10.13	**Table Light**	Supply and installation of table light. Location: Sr. Executive Rooms	Nos	2	1,180.00	2,360.00
10.14	**Down Light**	Supply and installation of down lights. Location: Sr. Executive Rooms	Nos	12	265.00	3,180.00
10.15	**Linear Light**	Supply and installation of linear lights Location: Reception Backwall	No	1	2,680.00	2,680.00
10.16	**Down Light**	Supply and installation of down light. Location: Reception	Nos	10	265.00	2,650.00
10.17	**Down Light**	Supply and installation of Down light. Location: Pantry, Server, Powder Room, Storage, Corridor	Nos	22	265.00	5,830.00
10.18	**LED Strip Light**	Supply and installation of led strip light. Location: Gyosum Ceiling Cove and Joinery	Lm	260	80.00	20,800.00
					SUBTOTAL FOR LIGHTING FIXTURE	**73,840.00**

	Make of Material:
Description	**Make**
Light Fittings	Light Make: Tecnolight/ AXOM / Equivalent

11	ELECTRICAL WORKS					
11.01	**Light Points**	Supply and installation of conduit and wiring for light points. PVC Conduit & PVC Wires	Nos	138	155.00	21,390.00
11.02	**Switches**	Supply and installation of conduit and wiring for light switches - BSS Finish - MK / Equivalent	Item	1	4,420.00	4,420.00
11.03	**13A Twin Socket**	Supply and installation of (1X13A) Twin Socket with conduiting & wiring complete (General, TV, Pantry, Storage) Brand Legrand - Europe, MK - UK	Nos	18	360.00	6,480.00
11.04	**Floor Box - 1**	Supply and installation of floor box with 2 x 13 twin socket and provision for 4 data	Nos	18	900.00	16,200.00
11.05	**Floor Box - 2**	Supply and installation of floor box with 1 twin, 2 data and 1HDMI outlet. Location: Meeting Rooms & Demo / Presentation	Nos	2	980.00	1,960.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	**ITEM**	**DESCRIPTION**	**UNIT**	**QTY**	**RATE**	**AMOUNT**
11.06	**Floor Socket**	Supply and installation of floor socket with 1 x 13 Amps single socket	Nos	5	815.00	4,075.00
11.07	**Power Provision**	Supply and installation of power provision for FCU	Item	1	6,130.00	6,130.00
11.08	**100x50mm GI Trunking**	Supply and installation of 100x50mm GI trunking for Light & Power cabling works.	Item	1	2,210.00	2,210.00
11.09	**Distrubtion Boards**	Supply and installation of distrubtion boards	Nos	2	3,535.00	7,070.00
11.10	**Armour Cable**	Supply and installation of armour cable (4c x 35sqmm + 1c)	Item	1	13,245.00	13,245.00
11.11	**DEWA Coordination Charges**	DEWA submission, inspection and documentation Charges	Item	1	2,945.00	2,945.00
11.12	**T & C**	T&C works by inhouse team	Item	1	2,945.00	2,945.00
11.13	**Containment for Low Current Systems**	Conduiting for all low current systems	Item	1	2,945.00	2,945.00
					SUBTOTAL FOR ELECTRICAL WORKS	**92,015.00**

	Special Notes
1	We considered the load requirement of 50 Kw approximately for proposed design and unit
2	We considerd sufficient load available in existing SMDB
3	In case of any power upgradation, will be considered as additional cost
4	Any IT /Data and low current works is excluded.
5	Switches and sockets considered BSS - MK/Equiv
6	PDUs for the work stations and the desks is excluded

12	**FIRE FIGHTING AND FIRE ALARM WORKS**					
	FIRE FIGHTING					
12.01	**Sprinkler systems**	Shut down and drianing of the existing sprinkler system	item	1		71,010.00
12.02	**Existing sprinkler systems**	Relocation of the existing pendant sprinkler system as per the propsed design	nos	26		
12.03	**New pendant sprinkler**	Supply and installation of new pendant sprinkler	nos	18		
12.04	**Sprinkler pipes**	Supply and installation of new sprinkler pipes	nos	18		
12.05	**ZCV**	Supply and installation of ZCV	item	1		
12.06	**Fire Extinguisher**	Supply and installation of fire extinguisher	Set	5		
12.07	**Testing and commissioning**	Testing and commissioning of sprinkler systems	item	1		
12.08	**DCD**	DCD coordination and certificate charges	Item	1		

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
	FIRE ALARM					
12.09	**Isolation**	**Isolation and re programming of the existing main fire alarm panel**	item	1		73,585.00
12.10	**Existing smoke detectors**	**Relocation of existing smoke detectors**	item	1		
12.11	**New Smoke Detector**	Supply and installation of new smoke detector.	Nos	24		
12.12	**Heat Detector**	Supply and installation of new Heat detector	nos	1		
12.13	**New Sounder**	Supply and installation of New Sounder	Nos	4		
12.14	**New Break Glass**	Supply and installation of new break glass.	No	4		
12.15	**FACP**	Supply and installation of new FACP	nos	1		
12.16	**IFU**	Supply and installation of interface module	Item	1		
12.17	**T&C**	Testing and commissioning of Fire alarm system	No	1		
12.18	**Certificate Charge**	DCD certificate charge	Item	1		
	EMERGENCY / EXIT LIGHTS					
12.19	**New Emergency Light**	Supply and installation of New Self Contained Emergency Light	Nos	16		25,000.00
12.20	**Existing emergecny light**	Relocation of existing emergency and exit lights as per the proposed design	item	1		
12.21	**Exit Light**	Supply and installation of new exit lights	Nos	6		
12.22	**CBS**	Re programming of the existing central battery systems	item	1		
12.23	**T&C**	Testing & commissioning of exit and emergency light	item	1		
12.24	**Certificate charges**	DCD certificate charges	item	1		
					SUBTOTAL FOR FIRE FIGHTING AND FIRE ALARM WORKS	**169,595.00**

	Special Notes:
1	DCD 24x7 Panel to be paid on actual by client, excluded in our offer.
2	We considered the existing emergency, exit and smoke detector in working condition, incase of replacement will be considered as additional cost.
3	Emergency/Exit Lights considered in our offer is self-contained type (8W, Fluorescent, not LED type) with 3 hours battery backup.

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
13	HVAC WORKS					
13.01	Preinsulated Phenolic Ductworks Exhuast	Supply and installation of Preinsulated Phenolic Ductworks, plenum boxes & necessary supports, VCD for the Exhaust System	m²	60		
13.02	Exhaust Fan	Supply and installation of Exhaust Fan for the toilet and pantry exhaust.	Lot	1		
13.03	Supply of FTU UNIT	Supply of Floor Terminal Unit (TU4) inclusive of two centrifugal fans, motorized damper, multifunctional electronic controller with "bus" communication card, air discharge and intake floor grills, 5m power connection cable with British Standard fused plug. This unit has an LCD Screen for reading all necessary data and easily changing them if required. Manufacturer: AET, UK.	Nos	17		268,800.00
13.04	Installation of FTU UNIT	Installation of Floor Unit (TU4) inside the Raised Access Floor, supply & installation of all necessary data (bus communication) cabling & RJ45.	Nos	17		
13.05	Floor Grille	Supply and installation of floor grille with raised floor adjustments	Nos	5		
13.06	Diffusers	Supply and installation of Return Grills and Diffusers	Lot	1		
13.07	Air Balancing	Air balancing works for the HVAC system	Lot	1		
13.08	Airfreight Cost	Airfreight Cost for above FTU System	Lot	1	27,500.00	27,500.00
					SUBTOTAL FOR HVAC WORKS	296,300.00

	Special Notes
1	Thermostat is fitted on the floor unit and settings need to done in the floor terminal units.
2	FTU/ AC units are 8-11 weeks via Airfreight
3	Proposed Exhaust system for toilet and pantry is subjected to building management approvals.

14	COLD WATER, SANITARY & DRAINAGE SYSTEM					
14.01	Plumbing Works	Supply and installation of new drainage lines, hot and cold water pipe lines, along with Testing and Commissioning complete for the toilet and pantry area	LS	1		8,020.00
14.02	Water Heater	Supply and installation of New water heater 50 Ltrs	No	1		
	NOTE: The budget is limited to final recommendation and selection of materials within the relevant pricing range. In any case that the selection will exceed the budget provided, a variation will be raised.					
14.03	Pantry Sink	Supply and installation of SS pantry sink including all necessary fittings.	No	1	2,060.00	2,060.00
14.04	Pantry Mixer	Supply and installation of mixer including all necessary fittings.	No	1	1,030.00	1,030.00
14.05	Wash Basin	Supply and installation of wash basin including all necessary fittings.	No	1	1,290.00	1,290.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
14.06	**Wash Basin Mixer**	Supply and installation of wash basin mixer including all necessary fittings.	No	1	878.00	878.00
14.07	**Wall Mounted Water Closet**	Supply and installation of wall mounted water closet + seat cover including all necessary fittings.	No	1	2,935.00	2,935.00
14.08	**Concealed Cistern**	Supply and installation of concealed cistern including all necessary fittings.	No	1	1,700.00	1,700.00
14.09	**Flush Plate**	Supply and installation of flush plate including all necessary fittings.	No	1	360.00	360.00
14.10	**Shattaf**	Supply and installation of shattaf including all necessary fittings.	No	1	155.00	155.00
14.11	**Toilet Roll Holder**	Supply and installation of shattaf including all necessary fittings.	No	1	260.00	260.00
14.12	**Robe Hook**	Supply and installation of robe hook including all necessary fittings.	No	1	140.00	140.00
14.13	**Drain**	Supply and installation of drain including all necessary fittings.	No	1	155.00	155.00
					SUBTOTAL FOR COLD WATER, SANITARY & DRAINAGE SYSTEM	**18,983.00**

	Special Notes
1	We are connecting the soil and waste line to the common corridor area base build pipes.
2	Any kind of water meter is not considered.

Make of Material	
Pipe	Cosmoplast Eqnt.
Water Heater	Ariston

15	MISCELLANEOUS					
15.01	**Final Cleaning**	Cleaning of site before handover.	LS	1	5,150.00	5,150.00
15.02	**Manual Sunscreen Roller Blinds**	Supply and installation of manual roller blinds including all necessary materials for fixing. Accessories: 1. Pulling Beads 2. Head Bracket 3. Head Plug 4. Under Beam 5. Tail Bracket Height: 3100 Location: Existing Window	m²	102	115.00	11,730.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)3697106 Fax (+9714)3697105
www.evolveinteriors.com

PROJECT: PROPOSED INTERIOR FIT-OUT & MEP WORKS FOR NSATS DIFC						
SUBJECT: BILL OF QUANTITIES - FITOUT & MEP WORKS					Date:	13-Jul-2023
Item No.	ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
15.03	Reception Logo (Specification Changed)	Supply and installation of logo in 3D metallic cut-out paste to black backpainted glass. Size: 3000mm L x 600mm H 	LS	1	9,750.00	9,750.00
					SUBTOTAL FOR MISCELLANEOUS	26,630.00

GRAND TOTAL AED	1,374,836.00

Evolve Interiors LLC
15th Floor, 51@Business Bay Tower
Dubai, United Arab Emirates
Tel (+9714)369710 Fax (+9714)3697105
www.evolveinteriors.com

EXCLUSIONS:

1.0 PC and Telephone is excluded.
2.0 Third Party T&C works excluded from our offer.
3.0 DEWA and Water Meter security deposit fees are excluded and to be paid by client based on actual receipts.
4.0 Any works / provisions outside demise area is excluded.
5.0 Loose Furniture, IT/Data, Low Current and AV Works is excluded from our offer.
6.0 TVs, LED Screen and it's necessary support is excluded from our offer.
7.0 Any kind of water meter is not considered.
8.0 PDUs for the work stations and the desks is excluded.
9.0 Display items and artworks are not in our scope.

NOTES:

1.0 Our offer is based on the proposed drawings, site visit and only for the items priced in our BOQ. Any changes in the scope of works in terms of design / quantity/ specification/ requirement by way of client, site condition, building management and Govt. Authorities will have cost & time implication in our offer and to be agreed upon during or before execution of the project.

2.0 DCD 24x7 Panel to be paid on actual by client, excluded in our offer.
3.0 We considered the existing emergency, exit and smoke detector in working condition, incase of replacement will be considered as additional cost.
4.0 Emergency/Exit Lights considered in our offer is self-contained type (8W, Fluorescent, not LED type) with 3 hours battery backup.
5.0 Thermostat is fitted on the floor unit and settings need to done in the floor terminal units.
6.0 FTU/ AC units are 8-11 weeks via Airfreight
7.0 Proposed Exhaust system for toilet and pantry is subjected to building management approvals.
8.0 We are connecting the soil and waste line to the common corridor area base build pipes.
9.0 We considered the load requirement of 50 Kw approximately for proposed design and unit
10.0 We considerd sufficient load available in existing SMDB
11.0 In case of any power upgradation, will be considered as additional cost
12.0 Switches and sockets considered BSS - MK/Equiv
13.0 All Authority & Landlord Fees is considered as Provisional sum (to be paid by client based on actual receipts)
14.0 The following facilities to be provided by the Client free of cost to us.
- Temporary Storage, water & electricity
- Access/Passes for workers
- Parking and loading/offloading area

15.0 The budget is limited to final recommendation and selection of materials within the relevant pricing range.
16.0 VAT to be added at the applicable prevailing rate upon invoicing.

VALIDITY:

1.0 This offer is valid only for 30 days upon issue. Evolve Interiors LLC reserves the right to revise the BoQ accordingly after this period.